




HOLDALL® T20 MK.II IX SWAGING MACHINE

Benefits Of Internal Expansion

- Easy safe & consistent assembly
- Excellent sealing & retention between coupling & hose
- Full - flow bore
- Reduced turbulence through the hose
- Full 360° uninterrupted internal expansion
- IX method fully complies with BSEN:1765/BS: 1435/EN: 14421
- Secure - Outperforms clamps & bands
- Reduced risk of bacteria traps in hygienic hose assemblies. CIP achievable

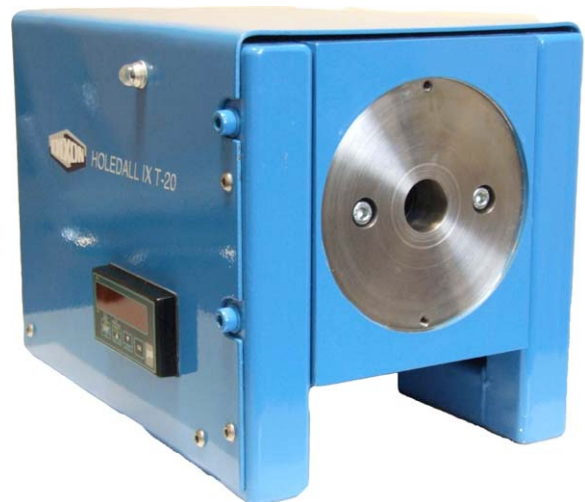

Technical Specification

Internal Swaging Capacity:	1in -3in (DN25 - DN80) Nominal Bore, Threaded, Victaulic, Flanged, Hygienic/Sanitary Couplings etc
Hydraulic Ram:	160mm stroke x 20 ton pull @10,000psi (700 bar)
Hydraulic Unit:	Power Team or equivalent, 2 Stage 30 cu.in/min
Oil Reservoir:	4.5 litre capacity with sight glass
Pressure Indication:	Digital Electronic Display
Electrical Power:	Power Supply: 220v 1ph. 50Hz
Operation:	Push Button Remote Control
Size: mm	330 (l) x 240 (w) x 300 (h)
Safety Features:	CE Marked in accordance with European Legislation

Dixon Group Europe Ltd

350 Walton Summit Centre, Preston, PR5 8AS
 Tel: +44(0)1772 323529 Fax: +44(0)1772 620373
 Website: www.dixoneurope.co.uk

